


# PMR™ FINISHES

Proven Mildew Resistant finishes for Demanding Building Environments.

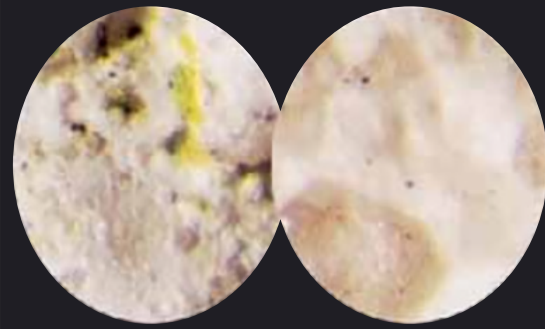

## PRODUCT DESCRIPTION

Dryvit Proven Mildew Resistant (PMR) finishes are designed to inhibit the growth of mildew in difficult mildew-prone environments. These 100% acrylic finishes incorporate state-of-the-art chemistry developed to help keep your building mildew free longer.

## USES

PMR finishes can be applied over properly prepared substrates such as Dryvit EIFS, exterior masonry, stucco, precast, cast-in-place concrete and other approved substrates. The finishes are also suitable for interior applications. All finishes can be trowel applied or spray applied with a hopper gun or pole gun-type sprayer.

## FEATURES & BENEFITS

FEATURE	BENEFIT
Single component	Ready to use, just add water
Dry polymer modified	Excellent durability, adhesion
Smooth consistency	Trowels easily thus more production
Vapor Permeable	Does not allow moisture buildup

## PROPERTIES

**Drying Time:** Drying of the finishes is dependent on the air temperature, relative humidity and finish thickness. Under average drying conditions [70 °F (21 °C), 55% R. H.], the finish will dry in 24 hours. Lower temperature and higher humidity will require that the PMR finish be protected for longer periods. Protect work from rain during the drying period.

## SURFACE PREPARATION

- Surface must be smooth and free of imperfections to ensure satisfactory appearance.
- Interior and exterior surfaces must be above 40 °F (4 °C) when applying finishes and must be clean, dry, structurally sound and free of efflorescence, grease, oil, form release agents and curing compounds.

**Dryvit Reinforced Base Coat:** The base coat must dry and have cured for a minimum of 24 hours before application of any finish.

**Concrete:** Shall be dry and have cured a minimum of 28 days prior to application of the finishes. If efflorescence, form release agents or curing compounds are present on the concrete surface, the surface shall be thoroughly cleaned with an appropriate commercial cleaner or method to remove any residue that will affect surface adhesion. Refer to ASTM D 4261, D 4260, D 4259, and D 4258 for various options. All projections shall be removed and small voids filled with Dryvit Primus®, Primus® DM, Genesis® or Genesis® DM mixture. Dryvit Color Prime™ shall be applied to the prepared concrete surface using a roller or brush (see product data sheet for mixing and application) prior to application of the finish.

## DS490

### COLORS

All finishes are available in standard colors as well as custom colors.

### TEXTURE

All finishes achieve a texture which is governed by aggregate size as well as the trowel motion in finishing the wall. Quarzputz® and Quarzputz® E produce an open-textured pattern in a regular or random style. Sandblast produces a sand-like texture. Sandpebble® and Sandpebble® E produce a rough, pebbly texture, which is ideal for masking surface imperfections. Freestyle® allows almost any ornamental trowel texture to be achieved. Sandpebble® Fine and Sandpebble® Fine E produce a fine pebble texture.

### PACKAGING

PMR finishes are shipped in 70 lbs pails. PMR E finishes are shipped in 40 lbs pails.


### COVERAGE

All coverages are approximate and depend upon substrate, details and individual application technique. **Quarzputz® PMR:** approximately 140 ft<sup>2</sup> (13 m<sup>2</sup>) per pail. **Sandblast® PMR:** approximately 150 ft<sup>2</sup> (14 m<sup>2</sup>) per pail. **Freestyle® PMR:** Must be calculated based on the texture desired. However, a coating thickness of 1.6 mm (1/16 in) to 1/4 in (6.4 mm) must be maintained. **Sandpebble® PMR:** approximately 130 ft<sup>2</sup> (12 m<sup>2</sup>) per pail. **Sandpebble® Fine PMR:** approximately 160 ft<sup>2</sup> (15 m<sup>2</sup>) per pail. **Quarzputz® E PMR:** approximately 120 ft<sup>2</sup> (11 m<sup>2</sup>) per pail. **Sandpebble® E PMR:** approximately 130 ft<sup>2</sup> (12 m<sup>2</sup>) per pail. **Sandpebble® Fine E PMR:** approximately 160 ft<sup>2</sup> (15 m<sup>2</sup>) per pail.



# PMR™ FINISHES

Proven Mildew Resistant finishes for Demanding Building Environments.

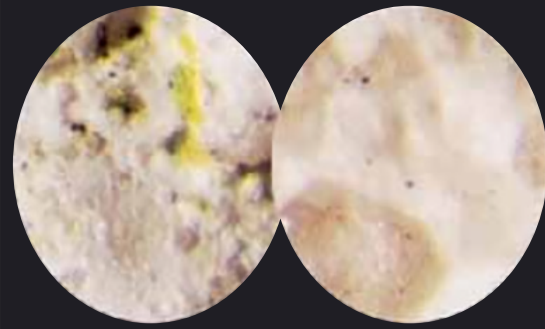

## SURFACE PREPARATION

**Masonry:** The masonry surface, with joints struck flush, shall be "skim coated" with Dryvit Primus, Primus DM, Genesis or Genesis DM mixture (see product data sheet for mixing and application) to produce a smooth, level surface.

**Stucco:** Dryvit Color Prime™, Color Prime W or Primer with Sand™ shall be applied over the cured brown coat surface using a roller or brush (see product data sheet for mixing and application) prior to applying the finish. If additives are present in the stucco, a test patch shall be made and bond strength checked prior to application.

## MIXING

Some settling of the finish may occur during shipping. Thoroughly mix the finish with a "Twister" paddle or equivalent mixing blade powered by a 1/2 in (12.7 mm) drill, 450-500 rpm, until a uniform workable consistency is attained.

## APPLICATION METHOD

**Quarzputz® PMR, Quarzputz® E PMR or Sandblast® PMR:** using a stainless steel trowel, apply and level a coat of Quarzputz® PMR, Quarzputz® E PMR or Sandblast® PMR to a uniform thickness (Quarzputz® PMR and Quarzputz® E PMR: no thicker than largest aggregate; Sandblast® PMR: applied in a thickness of 3/64 in (1.2 mm) – approximately 1 1/2 times largest aggregate). The textures are achieved by uniform hand motion and/or type of tool used. Maintain a wet edge for uniformity of color and texture.

**Sandpebble® PMR, Sandpebble® E PMR: Sandpebble® Fine PMR, and Sandpebble® Fine E PMR:** roughly apply an even coat of finish to a thickness slightly thicker than the largest aggregate size. Then pull across the rough application coat using a horizontal trowel motion and develop a uniform thickness no greater than the largest aggregate of the material. The textures are achieved by uniform hand motion and/or type of tool used. Maintain a wet edge for uniformity of color and texture.

**Freestyle® PMR:** using a stainless steel trowel, apply a coat of the Freestyle® PMR slightly thicker than 1/16 in (1.6 mm). The texture is either pulled out of this base or achieved by adding more Freestyle finish to the base layer using the same texturing motions that are used with other plaster materials, such as a skip trowel finish. The thickness of any Freestyle finish texture shall not exceed 1/4 in (6.4 mm).

## DS490

### STORAGE

- Finishes must be stored at a minimum 40 °F (4 °C) and a maximum 100 (4 °C) in tightly sealed containers protected from weather and out of direct sunlight.

### CAUTIONS & LIMITATIONS

- Avoid applying PMR finishes in direct sunlight. Always work on the shady side of the wall or protect the area with appropriate shading material.
- Dryvit finishes must not be used on exposed exterior horizontal surfaces. Minimum slope is 6 in 12 which is 27°. Maximum length of slope is 12 in (305 mm).
- Dryvit finishes shall not be used below grade when applied as the finish for an EIF system.
- Dryvit finishes are not intended for direct-applied, vertical applications over exterior gypsum based sheathing board, foam plastic insulation or other type insulation board.
- Dryvit finishes shall not be returned into any sealant joint. Instead a coat of Dryvit Color Prime or Dryvit Demandit Smooth shall be applied over the base coat that will be in contact with the sealant.

### MAINTENANCE

All Dryvit products are designed to require minimal maintenance. However, as with all building products, depending on location, some cleaning may be required. See Dryvit publication DS152 on cleaning and recoating.

### CLEAN UP

Clean tools with water while the finishes are still wet.


### TECHNICAL AND FIELD SERVICES

Available on request.



# PMR™ FINISHES

Proven Mildew Resistant finishes for Demanding Building Environments.

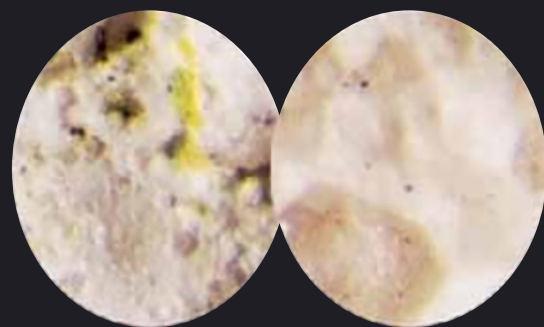

## PMR FINISH TESTING

Test	Test Method	Criteria	Results <sup>1</sup>
Surface Burning Characteristics	ASTM E 84	ICC and ANSI/EIMA 99-A-2001 Flame Spread <25 Smoke Developed <450	Passed
Flexibility <sup>2</sup>	ASTM D 522 Method B	No ICC or ANSI/EIMA Criteria	Passed: 2.0" diameter @ 73 °F
Water Vapor Transmission	ASTM E 96 Procedure B	ICC: Vapor Permeable No ANSI/EIMA Criteria	35 Perms
Accelerated Weathering	ASTM G 154 Cycle 1 (QUV)	ANSI/EIMA 99-A-2001 2000 hours: No deleterious effects <sup>3</sup>	5000 hours: No deleterious effects <sup>3</sup>
	ASTM G 155 Cycle 1 (Xenon Arc)	ICC: 2000 hours: No deleterious effects <sup>3</sup>	5000 hours: No deleterious effects <sup>3</sup>
Chalk Rating	ASTM D 4214 after ASTM G 154 Cycle 1	No ICC or ANSI/EIMA Criteria	Chalk rating: 8 after 5000 hours QUV
Instrumentally Measured Color Difference <sup>4</sup> (includes yellowing)	ASTM D 2244 CIELAB, 10° Observer after ASTM G 154 Cycle 1	No ICC or ANSI/EIMA Criteria	Color change: 1.05 Delta E after 5000 hours QUV
Freeze-Thaw Resistance	ASTM E 2485 (formerly EIMA 101.01)	ANSI/EIMA 99-A-2001 60 cycles: No deleterious effects <sup>3</sup>	90 cycles: No deleterious effects <sup>3</sup>
	ASTM E 2485 ICC – ES Proc. (AC212)	ICC: 10 cycles No deleterious effects <sup>3</sup>	10 cycles: No deleterious effects <sup>3</sup>
Mildew Resistance	ASTM D 3273 (formerly Mil Std-810B)	ANSI/EIMA 99-A-2001 28 days: No growth	60 days: No growth
Salt Spray Resistance	ASTM B 117	ICC and ANSI/EIMA 99-A-2001 300 hours: No deleterious effects <sup>3</sup>	1000 hours: No deleterious effects <sup>3</sup>
Water Resistance	ASTM D 2247	ICC and ANSI/EIMA 99-A-2001 14 days: No deleterious effects <sup>3</sup>	42 days: No deleterious effects <sup>3</sup>
Abrasion Resistance	ASTM D 968 Method A Falling Sand	ANSI/EIMA 99-A-2001 528 quarts (500 liters): No deleterious effects <sup>3</sup>	1057 quarts (1000 liters): No deleterious effects <sup>3</sup>
	ASTM D 4060 Taber Abrasion (1 kg load)	No ICC or ANSI/EIMA Criteria	1000 cycles: .91 mg loss
Adhesion to Concrete	ASTM D 4541	ICC and ANSI/EIMA 99-A-2001 15 psi minimum	>200 psi
Tensile Bond	ASTM C 297/E 2134 (formerly EIMA 101.03)	ICC and ANSI/EIMA 99-A-2001 15 psi minimum	>25 psi
Algae Resistance	SS 345:1990 (Appendix B)	No ICC or ANSI/EIMA Criteria	8 weeks; No algae growth

1. Testing referenced is based on Quarzputz® Pastel Base finish.

2. Finish applied over aluminum panels, bent on cylindrical mandrels as described in ASTM D 522 Method B. Lower diameter indicates higher flexibility.

3. No cracking, checking, rusting, crazing, erosion, blistering, peeling, or delamination when viewed under 5x magnification.

4. Delta E is total color difference, including yellowing, lightening, darkening, changes in red, blue, and green color values. Finish exposed to 5,000 hours of QUV prior to evaluating Delta E.

Information contained in this product sheet conforms to the standard detail recommendations and specifications for the installation of Dryvit Systems, Inc. products as of the date of publication of this document and is presented in good faith. Dryvit Systems, Inc. assumes no liability, expressed or implied, as to the architecture, engineering or workmanship of any project. To ensure that you are using the latest, most complete information, contact Dryvit Systems, Inc.

For more information on [Dryvit Systems](#) or [Continuous Insulation](#), visit these links.

Printed in USA. Issued 10-04-16 3  
©Dryvit Systems, Inc. 2004



Dryvit Systems, Inc.  
One Energy Way | West Warwick, RI 02893  
(800) 556-7752 | [www.dryvit.com](http://www.dryvit.com)